


Special product features

OTHER PRODUCTS FROM CHAUVIN ARNOUX® GROUP

PC Oscilloscopes

Model MTX 162

Compact, lightweight and stackable, these instruments can be connected directly to a PC via USB or Ethernet

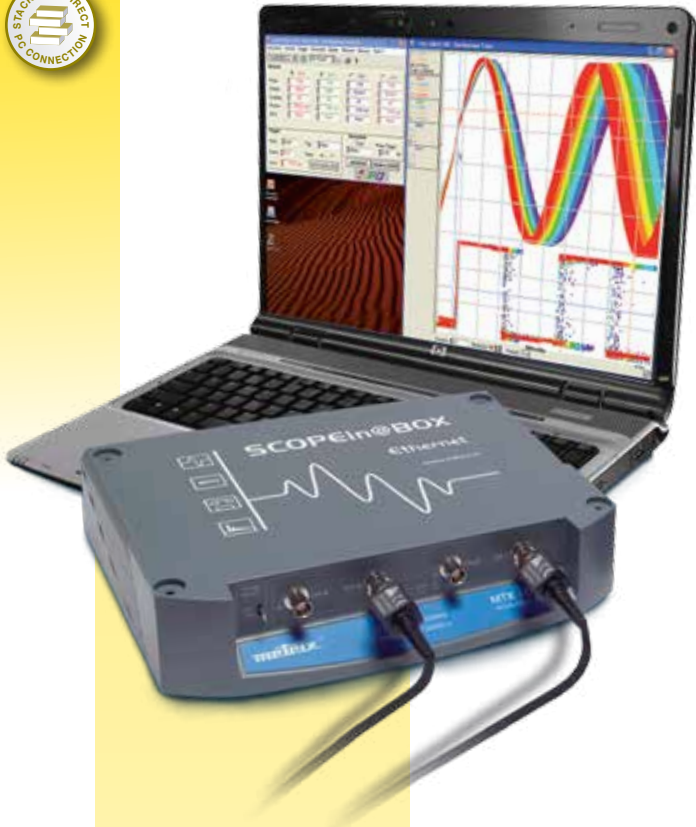


Connect and view results directly from your PC computer




SPECIFICATIONS

MODEL	MTX 162
INTERFACE	
Screen Specifications	Color PC screen (min. resolution: 1024 x 768)
Display Mode	8 x 10 div.- Multi-windowing (control panel, trace, zoom, FFT, etc.)
Traces on Screen	4 traces + 4 references
Screen Control	Windows-like & online help; All commands available via mouse
VERTICAL	
Vertical Sensitivity	5mV to 100V/div
Bandwidth	60MHz (bandwidth limiter: 15MHz, 1.5MHz or 5kHz)
Channels	2 channels, class 1, common ground
HORIZONTAL	
Time Base Speed	32 ranges from 5ns to 100s/div
TRIGGER	
Mode	Auto, Triggered, One-shot ROLL, Auto-level at 50%
Source	CH1, CH2, Line
Type	Rising or falling edge, adjustable pretriggering from 0 to 100%
DIGITAL MEMORY	
Max. Sampling Speed	Repetitive = 20GS/s; One-shot = 50MS/s
Vertical Resolution	8 bits
Memory Capacity	Depth = 50,000 points – storage capacity depends on PC configuration used
COMMUNICATION	
Software	PC operating software and LabWindows/LabView drivers (included)
SPO (SMART PERSISTENCE OSCILLOSCOPE)	
Duration of Persistence	Analog remanent mode
MEASUREMENT PROCESSING	
FFT Analyzer/MATH Functions	FFT, +, -, x, /
Manual Cursors	dv, dt, 1/dt, phase – cursors linked or unlinked to trace
Automatic Measurements	2 or 19 measurements out of 19 + automatic phase on/any type of curve markers and limits
RECORDER MODE	
Duration/Sampling	Dedicated ROLL mode from 2s to 33min

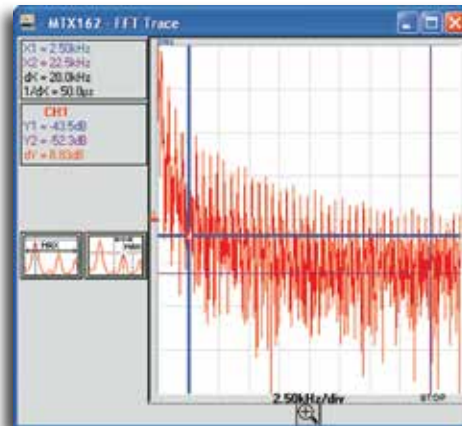

Real-time trace

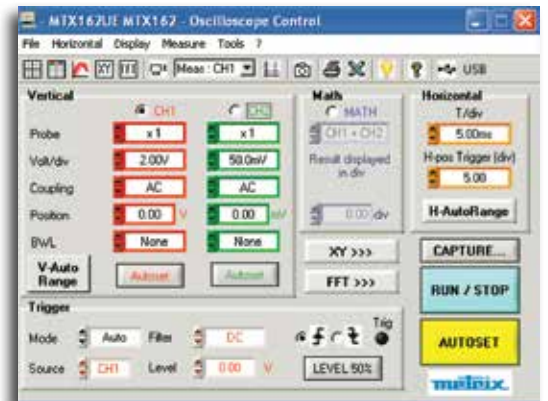

Typical PC setup screen

CATALOG NO.	DESCRIPTION
2150.14	PC Scope Module Model MTX 162UE (2-Channel, 60MHz)
2150.15	PC Scope Module Model MTX 162UEW (2-Channel, WiFi, 60MHz)